

asustor


AS-SAS8e

SAS HBA PCIe Expansion Card



Amplified Storage Solutions

The AS-SAS8e provides a high-performance storage connection to ASUSTOR's JBOD expansion units and supports the SAS-3 and NVMe protocols. This ensures reliable and fast data transfer rates and system efficiency, making the AS-SAS8e is suitable for enterprise-level applications requiring high capacity and high throughput.

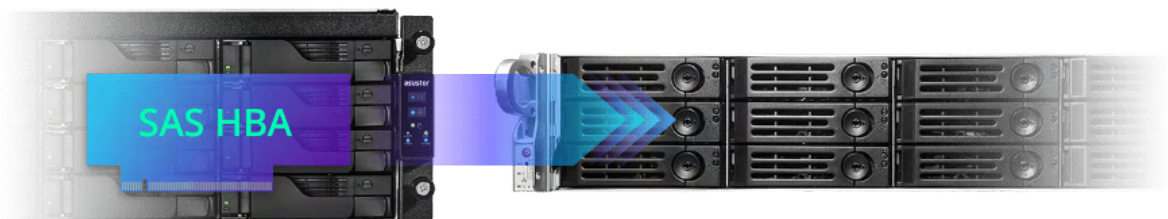

Stable and Fast

Compared with SATA III, SAS-3 has higher performance, lower latency, error correction and recovery, making it more suitable for enterprise-level scenarios that require scalability and reliability. SAS also supports SATA drives for maximum compatibility

Specification	
I/O Controller	SAS3808
External Connectors	2 x4 SFF-8644 (ext HD)
Host Bus Type	x8 lane PCI Express 4.0
Generation	12 Gb/s
External Ports	8
Storage Interface	12Gb/s SAS, 6Gb/s SATA, Gen 4.0 PCIe (NVMe)
Management Software	LSI Storage Authority (LSA), StorCLI (Command-Line Interface), HII (UEFI Human Interface Infrastructure)
MTBF	> 5,000,000 hours at 40° C
Operating Humidity	20% to 80% Non-condensing
Operating Temperature°C	0°C to 55°C
OS Support	ADM 5.0 Microsoft Windows, VMware vSphere/ESXi, Red Hat Enterprise Linux, SUSE Linux Enterprise Server, Citrix XenServer, CentOS Linux, Ubuntu Linux, Debian Linux, Oracle Enterprise Linux, Fedora, FreeBSD
Physical Dimensions	167.65 (+/-0.13) mm x 68.77 (+/-0.13) mm
Weight	300(g) / 0.66 (lb)
Applicable models	AS7112RDX / AS7116RDX PC
Brackets	Full height, low profile and ASUSTOR NAS bracket
Regulatory Certifications	Australia/New Zealand (AS/NZS CISPR 22), Canada ICES-003 Class B, CE Europe (EN55022/EN55024), Europe (EN55022/EN55024), Japan (VCCI V-3), Korea (RRA no 2013-24 & 25), RoHS, Safety: EN/IEC/UL 60950, Taiwan (CNS 13438), USA (FCC 47 CFR part 15 Subpart B, class B), WEEE
Warranty	3 years
Package Contents	AS-SAS8e HBA, Low Profile Bracket, FH (attached), Expansion Bracket



ASUSTOR Inc.

3F, No.136, Daye Rd., Beitou Dist., Taipei City 112, Taiwan Tel: +886 2 7737 0888 www.asustor.com

Designs and specifications are subject to change without notice.

© ASUSTOR Inc. ASUSTOR and all other ASUSTOR product names are trademarks or registered trademarks of ASUSTOR Inc.

All other product and company names mentioned herein are the trademarks of their respective owners.

Dealer Seal